



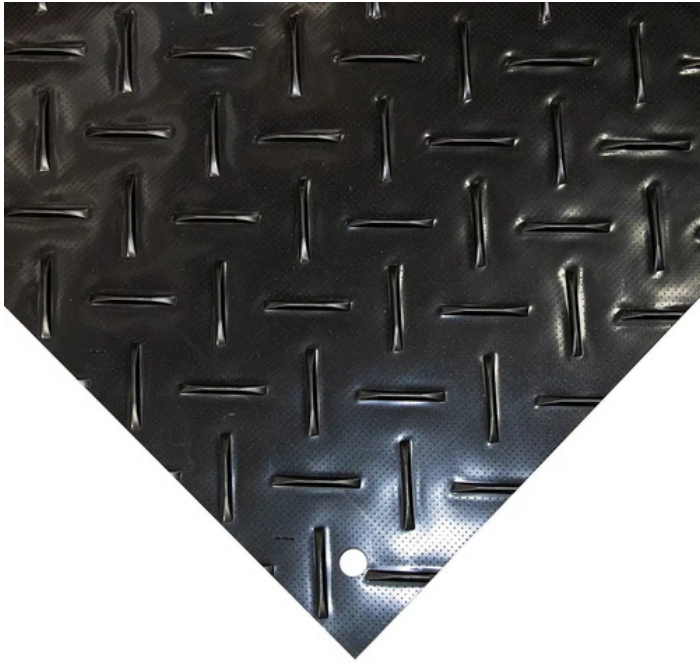

COBATrack HD Mat

Temporary Roadways for Serious Weight 50 - 120 Tonnes

- Engineered from recycled HDPE for heavy plant and machinery access
- Supports loads from 50 to 120 tonnes, depending on ground conditions
- Dual heavy traction surfaces for reliable all-weather grip
- 15 mm thick structural design for maximum durability
- Compatible with PU and steel connectors for secure configuration
- Reusable solution for large-scale construction and infrastructure projects
- Chosen for heavy plant access, crane pads and infrastructure works where substantial load distribution is required
- Suitable for civil engineering projects, utilities works and large-scale construction developments



Parts

Part Number	Size	Colour	Weight (kg)
TT010001HD	1.2 m x 2.4 m	Black	44

Technical Specifications


Material	High-Density Polyethylene (HDPE)
Min. Operating Temperature	-20°C
Max. Operating Temperature	+40°C
Environmental Resistance	All weather conditions
Typical Applications	Temporary roadways, heavy construction, military operations
Installation Method	Loose lay

COBATrack Steel Connector

Reusable Steel Connectors for COBATrack Mats



- Designed to securely connect COBATrack ground protection mats
- Bolt-free design enables faster installation on-site
- Available in both single and double connector formats
- Strong, secure fit helps reduce mat movement under load
- Durable steel construction for demanding environments
- Quick to install and easy to remove between projects
- Ideal for temporary access routes and reusable mat systems



Parts

Part Number	Size	Colour	Weight (kg)
CT01SDC	20.5 cm x 13.7 cm	Steel	0.4
CT01SSC	20.5 cm x 2 cm	Steel	0.1

Technical Specifications

Material	Steel
Typical Applications	Used to connect COBATrack Mats

COBATrack PU Connector

Reusable PU Connectors supplied with bolts for COBATrack Mats



- Reusable connectors designed specifically for COBATrack ground protection mats
- Available in both PU (bolt-fixed) and steel (tool-free) options
- Single and double connector formats to suit different layouts
- PU connectors supplied with plates and bolts for a strong, secure connection
- Steel connectors enable quick installation with no bolts required
- Provides a stable link between mats to reduce movement under load
- Quick to install and easy to remove for temporary or repeat use
- Durable construction suitable for demanding site conditions



Parts

Part Number	Size	Colour	Weight (kg)
CT01PUDC	19.3 cm x 19.3 cm	Black	1
CT01PUSC	19.3 cm x 6.3 cm	Black	0.45

Technical Specifications

Material	PU
Typical Applications	Used to connect COBATrack Mats