

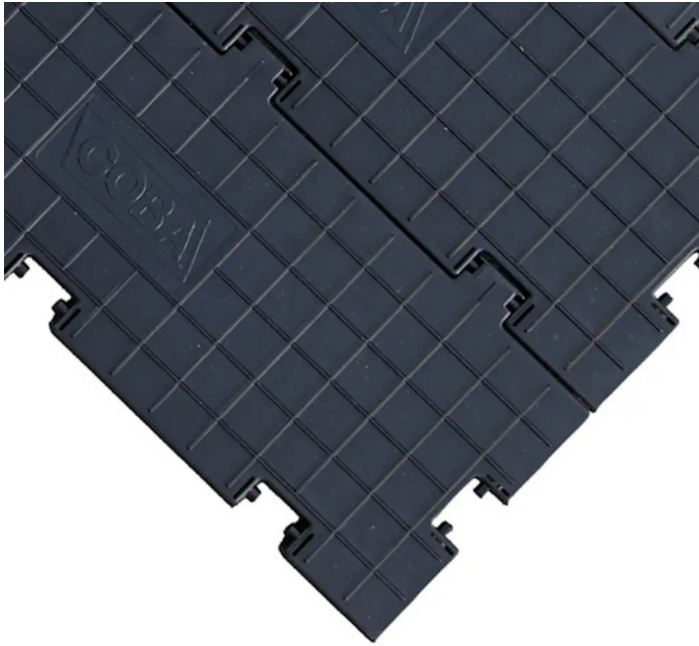




COBATrack Tiles

InstantAccess.ZeroGround Damage

- Impact-resistant polypropylene tiles for temporary ground protection and access routes
- Slip-resistant surface improves grip for pedestrians and light vehicles
- Supports loads up to 2 tonnes (depending on ground conditions)
- Suitable for grass, soil and uneven terrain
- Interlocking system creates stable temporary flooring without specialist tools
- 12 mm thick construction balances strength with manageable handling
- Reusable design reduces reinstatement and repair costs
- Specified for temporary pedestrian walkways, site access routes and event flooring over grass or soft ground
- Suitable for construction sites, outdoor shows, school grounds and public events where protecting turf and maintaining safe footing is essential
- Interlocking ramped edges are available to provide a smooth transition between matting and surrounding floor surfaces




Parts

Part Number	Size	Colour	Weight (kg)
CT010001	450 mm x 150 mm	Black	0.25

Technical Specifications


Material	PP
Surface Finish	Slip resistant raised pattern
Min. Operating Temperature	-10°C
Max. Operating Temperature	+50°C
Environmental Resistance	Suitable for outdoor use
Typical Applications	Construction, landscaping, events, catering and temporary car parks
Installation Method	Loose lay interlocking tiles

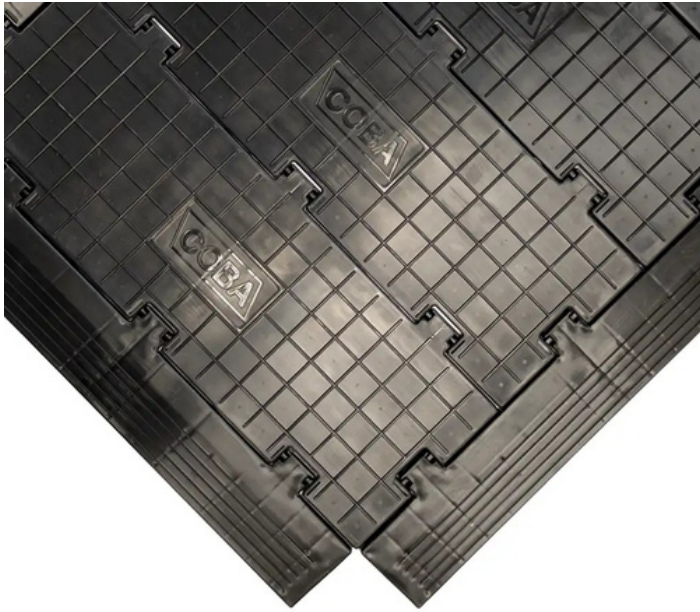

COBATrack Edges

Create a safe, seamless floor transition

- Impact-resistant polypropylene ramp edges designed for use with COBATrack Tiles
 - Seamlessly interlock with tile configurations to form a secure ramped border
 - Provides a smooth transition between matting and surrounding floor surfaces
 - Suitable for pedestrian and light vehicle access
 - Black finish matches COBATrack Tiles for a uniform appearance
 - 12 mm thickness designed to align with tile height
 - Designed exclusively for use with COBATrack Tiles, these ramp edges
 - complete any modular layout by reducing trip hazards at the perimeter
- Ideal for industrial and commercial environments where safe access and smooth floor transitions are essential, they enhance overall safety while maintaining a clean, professional finish

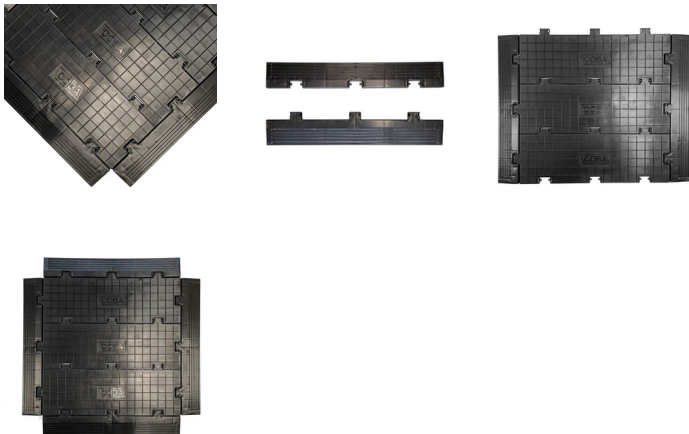

Parts

Part Number	Size	Colour	Weight (kg)
CTE010001F	450 mm x 65 mm	Black	0.1
CTE010001M	450 mm x 65 mm	Black	0.1

Technical Specifications

Material	PP
Surface Finish	Ribbed
Min. Operating Temperature	-10°C
Max. Operating Temperature	+50°C
Environmental Resistance	Suitable for outdoor use
Typical Applications	Used with COBATrack Tiles