




Bubblemat Nitrile

Smart anti-fatigue mat with a distinctive bubbled surface



- High-quality anti-fatigue mat.
- Raised bubble patterned surface encourages movement and stimulates circulation, reliably preventing signs of fatigue.
- Increased work safety due to slip resistance.
- NBR rubber (nitrile) for good resistance to oil, lubricants and chemicals.
- Available as individual mats or interlocking sections for longer production lines

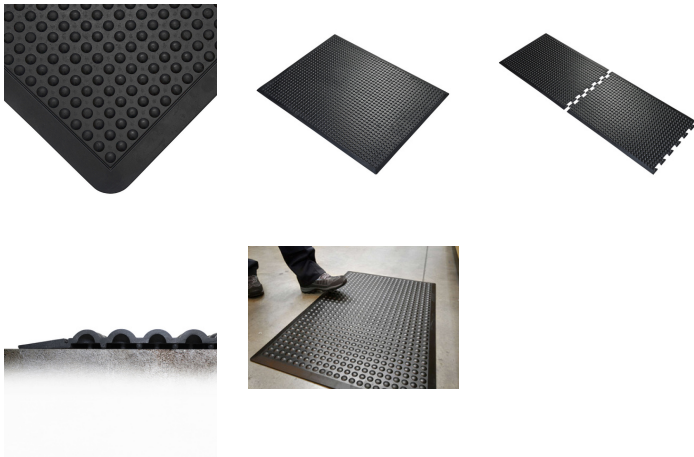

Parts

Part Number	Size	Colour	Weight (kg)
BF010004N	0.6 m x 0.9 m	Black (Nitrile)	5
BF010003N	0.6 m x 0.9 m	Black (Nitrile)	5
BF010002N	0.9 m x 1.2 m	Black (Nitrile)	11
BF010001N	0.6 m x 0.9 m	Black (Nitrile)	5

Technical Specifications

Material	NBR
Recycled Material Content %	23% recycled content
Surface Finish	Bubble
Product Height	14 mm
Min. Operating Temperature	-20°C
Max. Operating Temperature	+50°C
Resistance to Chemicals	NBR offers excellent resistance to oils and chemicals

Environmental Resistance	<i>Suitable for predominantly dry environments</i>
UV Resistance	<i>Yes</i>
Typical Applications	<i>General industrial</i>
Installation Method	<i>Loose lay interlocking mats</i>
Cleaning Method	<i>Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats</i>
Tensile Strength	<i>3 MPa</i>
Elongation	<i>250%</i>
Application Temperature	<i>-30°C to 50°C</i>
Manufacturing process	<i>Compression moulding</i>