


## Bubblemat Safety

Smart anti-fatigue mat with a distinctive bubbled surface



- Highly effective anti-fatigue mat.
- Edges in yellow signal colour for increased work safety.
- The bubbles of this workplace mat encourage more movement and stimulate the circulation, reliably preventing signs of fatigue.
- Increases safety at the workplace as an anti-slip mat.
- Ideal for standing workplaces in industry and manufacturing.
- Available as individual mats or interlocking modules.

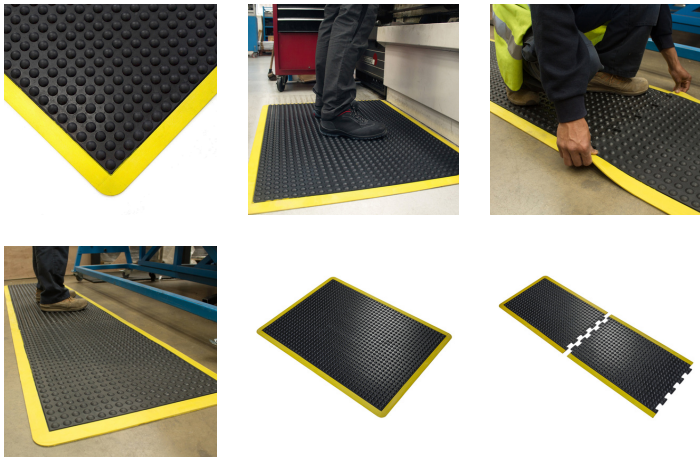

### Parts

Part Number	Size	Colour	Weight (kg)
BF010702	0.9 m x 1.2 m	Black/Yellow	11
BF010701	0.6 m x 0.9 m	Black/Yellow	5.5
BF010706	0.9 m x 1.2 m	Black/Yellow	11
BF010705	0.9 m x 1.2 m	Black/Yellow	11
BF010704	0.6 m x 0.9 m	Black/Yellow	5.5
BF010703	0.6 m x 0.9 m	Black/Yellow	5.5

### Technical Specifications

Material	Natural rubber
Recycled Material Content %	30% recycled content
Surface Finish	Bubble
Product Height	14 mm
Min. Operating Temperature	-20°C
Max. Operating Temperature	+50°C
Resistance to Chemicals	Not resistant to fat and mineral oil

<b>Environmental Resistance</b>	<i>Suitable for predominantly dry environments</i>
<b>UV Resistance</b>	<i>Yes</i>
<b>Typical Applications</b>	<i>General industrial</i>
<b>Installation Method</b>	<i>Loose lay interlocking mats</i>
<b>Cleaning Method</b>	<i>Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats</i>
<b>Tensile Strength</b>	<i>3 MPa</i>
<b>Elongation</b>	<i>250%</i>
<b>Application Temperature</b>	<i>-30°C to 50°C</i>
<b>Manufacturing process</b>	<i>Compression moulding</i>