


High-Duty Grit

Reduce slips and standing fatigue in one



- Provides both slip-resistance and fatigue-relief.
- 'Grit' coating and raised surface pattern combine for highly effective slip resistance.
- Material composition means it is highly resistant to chemicals, oils and grease.
- Provides fatigue-relief from cold hard floors.
- Ideal for demanding locations such as engineering workshops.
- Moulded bevelled edges reduce trip hazards.
- Open drainage holes for spilt liquids.
- Slip tested to DIN 51130.

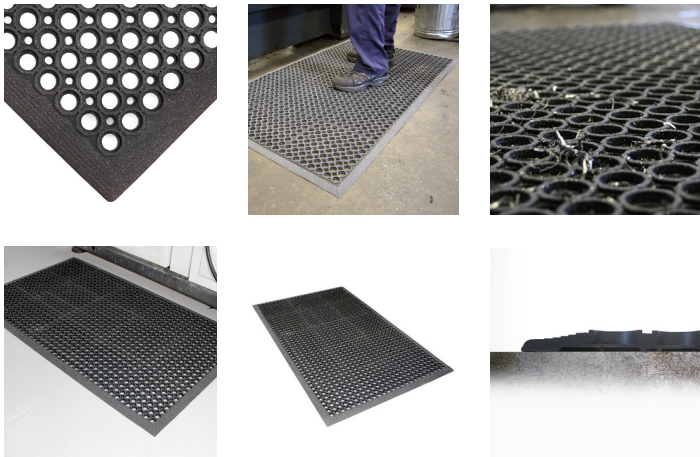

Parts

Part Number	Size	Colour	Weight (kg)
HI010001G	0.9 m x 1.5 m	Black	11

Technical Specifications

Material	NBR
Natural Material Content %	65
Surface Finish	Carbide bonded to rubber with holes to allow drainage
Product Height	13 mm
Product Weight	11 kg
Hole Size	21 mm
Max. Operating Temperature	+70°C
Resistance to	Resistance to mineral oils and animal fats

Chemicals	
Environmental Resistance	<i>Suitable for oily environments</i>
UV Resistance	<i>Moderate</i>
Typical Applications	<i>Demanding locations e.g. Engineering workshops, Machine tool areas where swarf is prevalent</i>
Installation Method	<i>Loose lay</i>
Cleaning Method	<i>Pressure hose with mild detergent or pass through commercial dishwasher</i>
Storage and application	<i>Store at room temperature, free from deformations.</i>
Tensile Strength	<i>ASTM D412, 5 (+/-1)Nm/mm²</i>
Elongation	<i>ASTM D412, 250% (+/-50%)</i>
Application Temperature	<i>18°C to 82°C</i>
Slip Tested to	<i>DIN 51130 - R13</i>
Manufacturing process	<i>Compression moulding</i>

Additional Information



High Duty Grit DIN 51130 Ramp Slip Test