


High-Duty

Reduce standing fatigue at larger or oily workstations



- A very comfortable alternative to cold hard floors.
- Open holes capture spilt liquids and swarf.
- Manufactured from a blend of rubber for better than average resistance to oil and chemicals.
- Available in standard mats, edged on all sides, or as interlocking modules for larger areas.
- Raised circular surface gives excellent underfoot grip.
- Slip tested to DIN 51130.

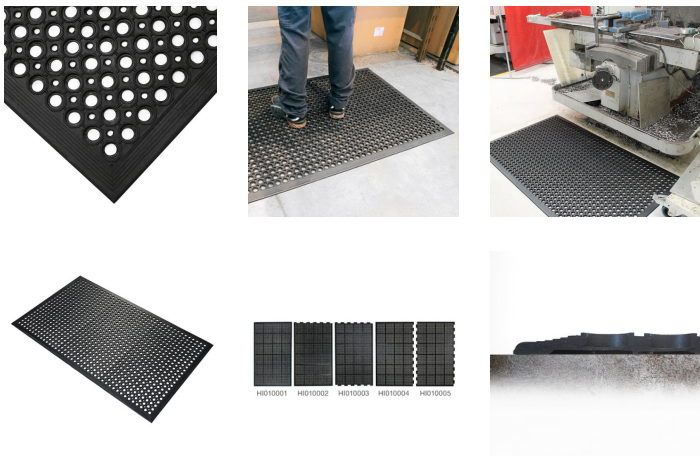

Parts

Part Number	Size	Colour	Weight (kg)
HI010005	0.9 m x 1.5 m	Black	11
HI010004	0.9 m x 1.5 m	Black	11
HI010003	0.9 m x 1.5 m	Black	11
HI010002	0.9 m x 1.5 m	Black	11
HI010001	0.9 m x 1.5 m	Black	9.2

Technical Specifications

Material	Natural rubber/25% NBR compound
Recycled Material Content %	62.07%
Natural Material Content %	30
Surface Finish	Circular pattern construction for extra grip and holes to allow drainage
Product Height	12 mm
Min. Operating Temperature	-20°
Max. Operating	+70°C

Temperature	
Resistance to Chemicals	<i>Limited resistance to chemicals</i>
Environmental Resistance	<i>Suitable for wet and dry environments</i>
UV Resistance	<i>Moderate</i>
Typical Applications	<i>Food manufacturing, General industrial, Machine tool areas where swarf is prevalent</i>
Installation Method	<i>Loose lay interlocking mats</i>
Cleaning Method	<i>For regular maintenance, hose with water. For excessive dirt scrub with a mild detergent and rinse.</i>
Tensile Strength	<i>ASTM D412, 3 (+/-1)Nm/mm²</i>
Elongation	<i>ASTM D412, 200% (+/-50%)</i>
Application Temperature	<i>18°C to 65.5°C</i>
Slip Tested to	<i>DIN 51130 - R10</i>
Manufacturing process	<i>Rubber moulding</i>

Additional Information



High Duty DIN 51130 Ramp Slip Test