


## Tough Deck

Recycled drainable workplace tiles



- Non-slip interlocking decking for wet areas.
- Combination of substantial product height and large holes offers excellent drainage.
- An economical yet heavy-duty matting solution.
- Easy DIY installation with connectors that conceal joins.
- Ideal for industrial use, especially in areas prone to liquid spillage.
- Ramped edges to prevent trips are available in black or yellow.
- Provides entry level anti-fatigue properties.
- Slip tested to DIN 51130.

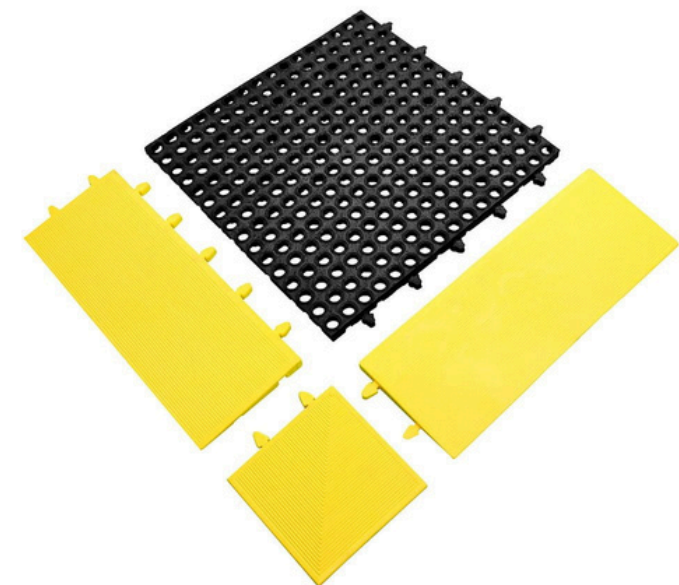

### Parts

Part Number	Size	Colour	Weight (kg)
TDC070001C	0.18 m x 0.18 m	Yellow	1.6
TDC010001	0.18 m x 0.18 m	Black	1.168
TDT010001	0.48 m x 0.48 m	Black	1.95
TDE070001M	0.48 m x 0.18 m	Yellow	1.4
TDE070001F	0.48 m x 0.18 m	Yellow	1.2
TDE010001M	0.48 m x 0.18 m	Black	1
TDE010001F	0.48 m x 0.18 m	Black	1

### Technical Specifications

Material	100% recycled rubber & plastic with exception of the yellow edges
Recycled Material Content %	100% recycled rubber & plastic with exception of the yellow edges
Product Height	20 mm
Product Weight	1.95 kg
Hole Size Slip	16 mm
Tested to	DIN 51130 - R10
Max recommended contact pressure:	1.85 MPa

### Additional Information



Tough Deck Ramp Slip Test DIN 51130

