


## Bubblemat Connect

Interlocking tiles with high anti-fatigue properties



- Durable anti-fatigue matting system.
- Raised bubbled surface to stimulate blood circulation and reduction of fatigue.
- Interlocking system provides flexibility in the type of shape that can be created.
- Soft but sturdy rubber material offers protection from adverse effects from cold, hard concrete floors.
- Rubber is naturally slip resistant.

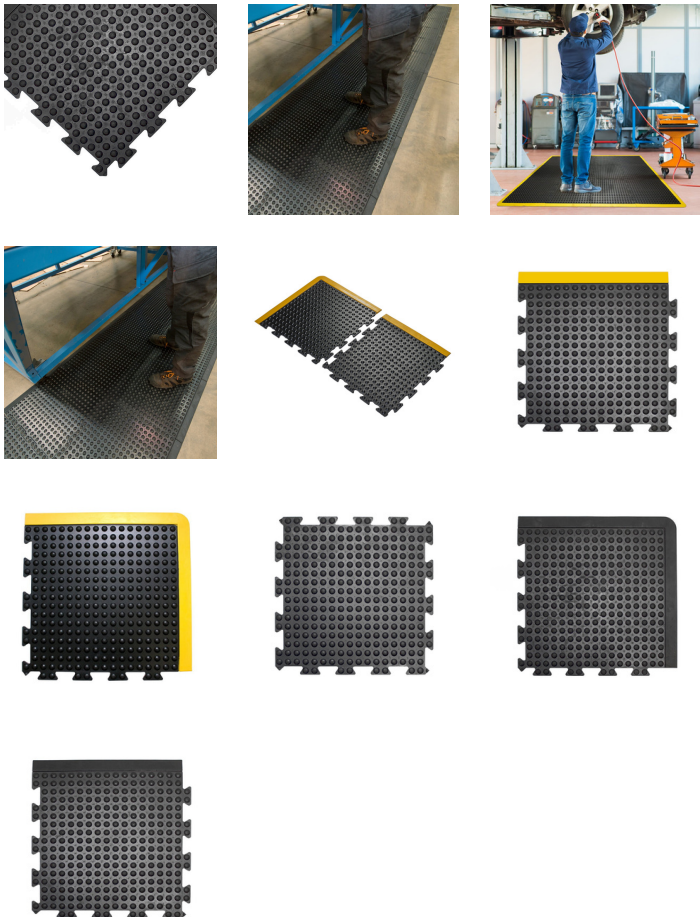

### Parts

Part Number	Size	Colour	Weight (kg)
BF010709	50 cm x 50 cm	Black/Yellow	2.15

### Technical Specifications

Material	Natural rubber
Recycled Material	43% recycled content

Part Number	Size	Colour	Weight (kg)
<i>BF010708</i>	<i>50 cm x 50 cm</i>	<i>Black/Yellow</i>	<i>2.15</i>
<i>BF010009</i>	<i>50 cm x 50 cm</i>	<i>Black</i>	<i>2.15</i>
<i>BF010008</i>	<i>50 cm x 50 cm</i>	<i>Black</i>	<i>2.15</i>
<i>BF010007</i>	<i>50 cm x 50 cm</i>	<i>Black</i>	<i>2.15</i>

Content %	
Surface Finish	<i>Bubble</i>
Product Height	<i>13.5 mm</i>
Product Weight	<i>5,75 kg</i>
Min. Operating Temperature	<i>-30°C</i>
Max. Operating Temperature	<i>+50°C</i>
Resistance to Chemicals	<i>Not resistant to fat and mineral oil</i>
Environmental Resistance	<i>Suitable for dry indoor environments</i>
UV Resistance	<i>Yes</i>
Installation Method	<i>Loose lay interlocking mats</i>
Cleaning Method	<i>Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats.</i>
Tensile Strength	<i>3 MPa</i>
Elongation	<i>250%</i>
Manufacturing process	<i>Compression moulding</i>