




Conductive Rubber Bench Matting

Two layer anti-static rubber matting



- Dual layer mat manufactured from rubber with coloured top surface and black bottom surface.
- Top surface: 0.5 mm thick static-dissipative layer.
- Solder iron resistant and low reflecting bench mat ideal for electrical component manufacturing and refurbishment.
- Grounded via a 10 mm male stud fitted to the mat.
- Conforms to IEC 61340-5-1.
- Point to point resistance (R_{p-p}): $5.2 \times 10^7 \Omega$
- Resistance to a groundable point (R_{gp}): $2.7 \times 10^7 \Omega$

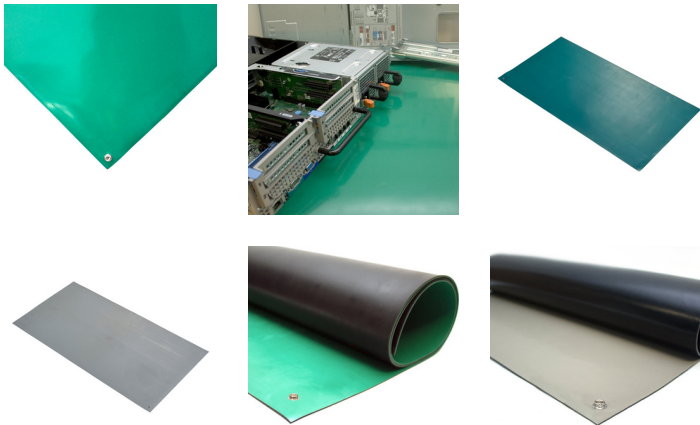

Parts

Part Number	Size	Colour	Weight (kg)
CDR040004	0.6 m x 1.2 m x 2 mm	Green	2.35
CDR060004	0.6 m x 1.2 m x 2 mm	Grey	2.35

Technical Specifications

Material	Rubber
Surface Finish	Smooth
Product Height	3 mm
Min. Operating Temperature	-30°C
Max. Operating Temperature	+70°C
Environmental Resistance	Suitable for dry indoor environments

Additional Information

