




## COBAelite® Bubble

*Excellent fatigue relief with superior resilience*

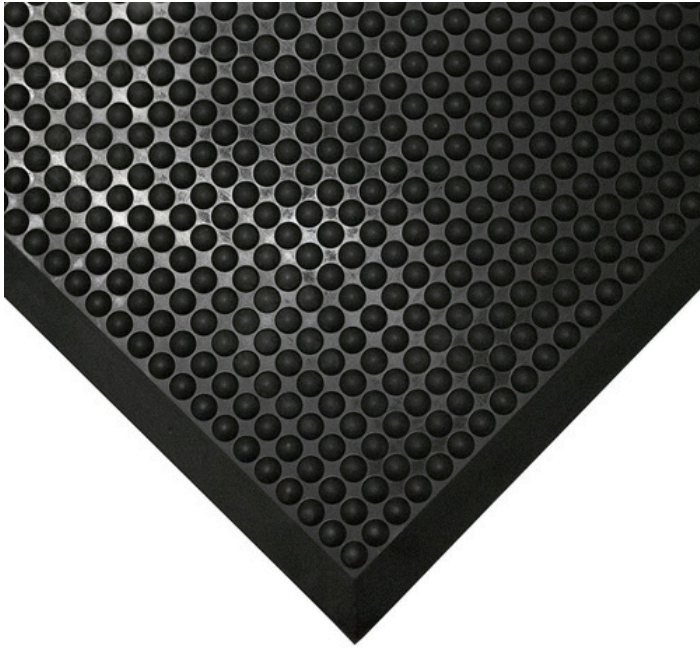

- *Improve comfort when standing in the workplace.*
- *Raised surface stimulates blood circulation and foot movement.*
- *Superior material ensures durability.*
- *Ramped edges help avoid creating a trip risk.*
- *Loose lay – can easily be installed in a wide array of workplaces.*
- *Fire tested to BS EN 13501-1.*



### Parts

| Part Number     | Size                 | Colour       | Weight (kg) |
|-----------------|----------------------|--------------|-------------|
| <i>SE010010</i> | <i>Special size</i>  | <i>Black</i> |             |
| <i>SE010003</i> | <i>0.9 m x 1.2 m</i> | <i>Black</i> | <i>4.5</i>  |
| <i>SE010001</i> | <i>0.6 m x 0.9 m</i> | <i>Black</i> | <i>2</i>    |

### Technical Specifications

|                            |                                                           |
|----------------------------|-----------------------------------------------------------|
| Material                   | <i>PU</i>                                                 |
| Surface Finish             | <i>Bubble</i>                                             |
| Product Height             | <i>15 mm</i>                                              |
| Product Weight             | <i>2.5 kg ± 0.2</i>                                       |
| Min. Operating Temperature | <i>-40°C</i>                                              |
| Max. Operating Temperature | <i>+80°C</i>                                              |
| Resistance to Chemicals    | <i>PU offers limited resistance to chemicals and oils</i> |
| Environmental Resistance   | <i>Suitable for dry indoor environments</i>               |
| UV Resistance              | <i>Yes</i>                                                |

|                      |                                                         |
|----------------------|---------------------------------------------------------|
| Typical Applications | <i>General industrial, Retail</i>                       |
| Installation Method  | <i>Loose lay</i>                                        |
| Cleaning Method      | <i>Brush down, vacuum clean and wipe with wet cloth</i> |
| Fire Tested to       | <i>BS EN 13501-1 Class Efl - s1</i>                     |

## ***Additional Information***



***COBAelite BS EN 13501 Fire Test***



***COBAelite EN ISO 11925 Fire Test***



***COBAelite EN ISO 9239 Fire Test***