





Unimat

Heavy-duty anti-fatigue matting for wet areas

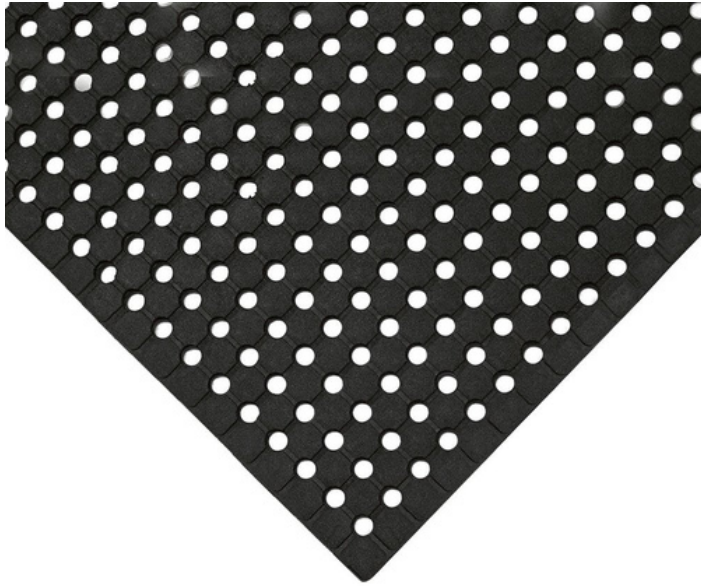

- Versatile rubber runner.
- Open holes provide excellent drainage.
- A real asset in helping to prevent slipping in wet areas.
- Easy to roll up and move to new locations or for cleaning.
- Slip tested to DIN 51130.



Parts

Part Number	Size	Colour	Weight (kg)
UM010002C	1 m x per linear metre	Black	
UM010002	1 m x 10 m	Black	74
UM010001	1 m x 5 m	Black	37

Technical Specifications

Material	Rubber mix, including >75% recycled material.
Recycled Material Content %	75%
Surface Finish	Raised anti-slip textured surface with holes to allow drainage
Product Height	10 mm
Product Weight	4 kg
Roll Length	10 m
Min. Operating Temperature	-20°C
Max. Operating Temperature	+130°C
Resistance to Chemicals	Resistant to water and most mild acids

Environmental Resistance	<i>Suitable for wet and dry indoor environments</i>
Typical Applications	<i>General industrial</i>
Installation Method	<i>Loose lay</i>
Cleaning Method	<i>Hose down or pressure wash using a mild detergent</i>
Other Product Performance Information	<i>Impact resistant up to 3 kg /c m²</i>
Tensile Strength	<i>3 to 3.5 MPa</i>
Slip Tested to	<i>DIN 51130 - R10</i>

Additional Information



Unimat - Ramp Slip Test DIN 51130